
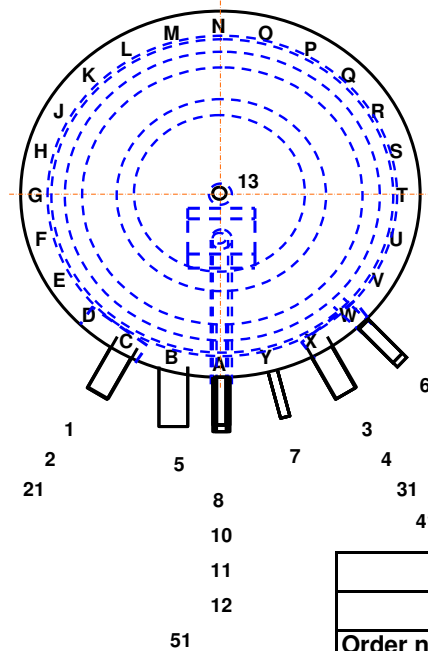


Kippmass: 2'125 mm

Auftrags-Nr: 102214

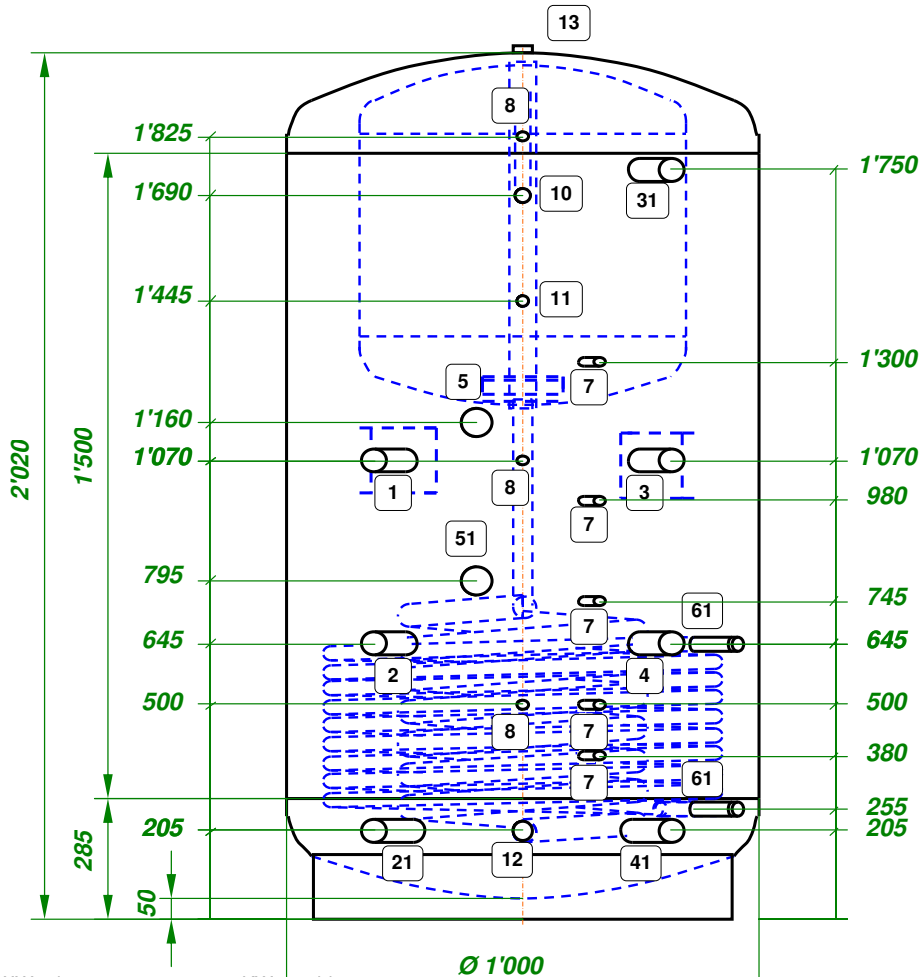

WW = hot water      KW = cold water  
 SL = Supply line      RL = Return line      circ. = circuit      SU = Stratification u-profile      GRWT = bare pipe heat exchanger

Pos	Ø	L =	Bezeichnung	Stk.	Pos	Ø	L =	Bezeichnung	Stk.
1	6/4"	130	SL-RL Supply circ./heating circ. with SU	1	13	3/4"	16	venting sleeve (IG)	1
2	6/4"	130	RL - SL Supply circ./heating circ. (IG)	1	21	6/4"	130	RL - SL Supply circ./heating circ. (IG)	1
3	6/4"	130	SL-RL Supply circ./heating circ. with SU	1	31	6/4"	130	Top SL Supply circ. (IG)	1
4	6/4"	130	RL - SL Supply circ./heating circ. (IG)	1	41	6/4"	130	RL - SL Supply circ./heating circ. (IG)	1
5	2"	130	E-inset sleeves (IG)	1	51	2"	130	E-inset sleeves (IG)	1
7	1/2"	130	sensor sleeves (IG)	5	60	820	390	GRWT 2,4 m <sup>2</sup>	1
8	1/2"	130	Thermometer sleeves (IG)	3	61	1"	150	GRWT-sleeves (AG)	2
10	1"	150	WW outlet [boiler] (AG)	1	80	700	790	TOPSOL 270 / prel. heat exch. 1.8 m <sup>2</sup>	1
11	1/2"	150	Circulation [boiler] (AG)	1					
12	5/4"	150	KW supply line [boiler] (AG)	1					

Order no.:	102214
Type:	TOP-SOL 1450
Customer:	PV09
Designation:	combined storage tank
Volume:	1146 / 286 [Ltr.]
Operating-/ test pressure:	3 / 4.5 [bar]
Base / Shell	3 / 2.5 [mm]

Material:	St 37-2 / 1.4571
Overall weight	288 [kg]
Surface treatment:	Inside unfinished, outside primed
Insulation:	PU soft foam 130 mm
Jacketing/colour:	
Compiled by / date:	am 20. Dez. 08
Delivery date	
Ready for delivery	


**FEURON**  
 Präzise Speicherlösungen

Nollenhornstr. 7  
 CH - 9434 Au SG

Telefon: +41 (0)71 747 40 80;      Fax: +41 (0)71 747 40 90  
 www.feuron.com      mail@feuron.com